

XMF

BASE DEVICE // DIGITAL-AUDIO

NEXUS MADI interface

THE MADI INTERFACE CARD FOR NEXUS BASE DEVICES

THE XMF MADI CARD PROVIDES A SIMPLE, POWERFUL SOLUTION FOR CONNECTING A NEXUS SYSTEM TO MADI EQUIPMENT ANYWHERE.



The XMF card is ideal for exchanging many channels with external MADI-capable devices. Up to 64 channels can be received and transmitted. The board supports 56 and 64 channel MADI formats and automatically detects incoming audio streams. The XMF card also supports legacy mode, where the MADI connection works at twice the sampling rate, i.e. up to 96 kHz, but half the number of channels. In transparent mode, AES additional data can be transferred and read out and are available for further use by the user.

The XMF card can also receive compressed or encoded audio signals on MADI channels and transmit them transparently over the NEXUS network. It is certified by Dolby Laboratories for the transmission of Dolby-E. Optionally, sample rate converters for 64 channels are available, which can be assigned either completely to the inputs or outputs or 32 channels each. Each XMF board has a BNC input, a BNC output and an SFP port that can be equipped with different optical modules: Multimode and Singlemode SFPs for different fibre lengths are available.

Combined version: BNC input, BNC output and LC optical connection

The board has both BNC and optical LC connectors via which the Madi signal can be fed into the base unit. The preferred input can be selected in the operating software; in automatic mode, the module automatically recognizes which connection is used.

Adjustable digital gain in the inputs

The input signals can be amplified or reduced with a digital gain adjustable in 1dB steps.

Transmission of Dolby E signals

The XMF board is certified by Dolby Laboratories, Inc. to transmit Dolby E signals.

Optional sample rate converter

Optional sample rate converters can be supplied for the XMF card, which can be optionally assigned to the inputs or outputs.

Support of MADI legacy audio at 96 kHz

MADI data streams in legacy format can also be received and sent. By halving the number of channels, the sampling rate can be doubled.

In the studio application feeding of multi-channel audio, e.g. from effect racks

It is becoming increasingly common for external digital devices to support mixing consoles with effects. The MADI standard has proven itself in both studio and live operation. Well-known companies offer hardware solutions that use this format and have found an easy way to integrate their systems into the NEXUS network in the XMF card. Examples include the Waves Soundgrid system and the Universal Audio Live Rack with its electrical and optical MADI interfaces for real-time audio effects.

Connection of DAWs or other multi-channel feed systems

Shows and events are often supported with feeds from DAWs or other playback systems. Integrating such multi-channel audio sources into NEXUS-based production is easy with the XMF-MADI interface. Multiple MADI connections can be seamlessly integrated and the channels, including status information, can be routed on the NEXUS network. With the same interface, e.g. DirectOut or other audio signals for recording can be sent on the return channel.

Connections between different NEXUS networks

It is possible for two separate NEXUS networks to exchange audio channels, but it is not possible to merge them, such as temporary scenarios such as support for studio production by an OB truck or collaboration between several OB vans during an event. Even permanent installations, such as 96 kHz for recording and 48 kHz for sound reinforcement and broadcasting, require separate NEXUS systems; in these situations where separate NEXUS networks are required to exchange audio channels, this can easily be done via MADI lines. The optional sampling rate converters ensure optimum connectivity even in asynchronous operation.

CONNECTIONS

XMFI_04	1 x 4TE		
BNC	2 x	MADI	Input
BNC	1 x	MADI	Output
SFP	1 x	MADI	Bidirectional



TECHNICAL DATA

Features

	All relevant specifications comply with the following standards: AES 10-1991 (ANSI S4.43-1991), AES 10id-1995; AES 10-2008
Data formats	MADI transparent routing of compressed audio Dolby E certified
Data rate	125 Mbit/s
Sample rates	44,1 kHz 48 kHz 88,2 kHz 96 kHz
Amplitude resolution	24 Bit
Latency	RX < 3 samples TX = 2 samples

Outputs

Configuration	Format conversion, transparent forwarding of all MADI-format user bits
Number of channels	1...64 (1...32 @ 96 kHz)
Optical	(e.g. SPM-3102WG module) LC, 1310 nm, 62.5/125 μ m, -19...-12 dBm
Electrical	BNC connector Differential, galvanically isolated output Output impedance: 75 Ω

Inputs

Channels	1...64, automatic detection (1...32 at 96 kHz)
Optical	(e.g. module SPM-3102WG) LC, 1310 nm, 62.5/125 μ m, -31...-8 dBm
Electrical *	BNC connector Differential, galvanically isolated input Input impedance: 75 Ω

Cable lengths

Optical LC	Multimode max. 2 km singlemode max. 100 km (depends on module and fiber)
Electric BNC	Max. 50 m (recommended)

Operation conditions

Temperature range	0 °C to +50 °C
Humidity	Max. 90 %, non-condensing

Storage conditions


Temperature range	-35 °C to +70 °C
Humidity	Max. 90 %, non-condensing

Power supply

Voltage	+4,75...5,25 V
Current	400 mA (without SRCs) 1250 mA (with SRCs)

Mechanical data


Weight	0,25 kg 0,27 kg (with SRCs)
--------	-------------------------------

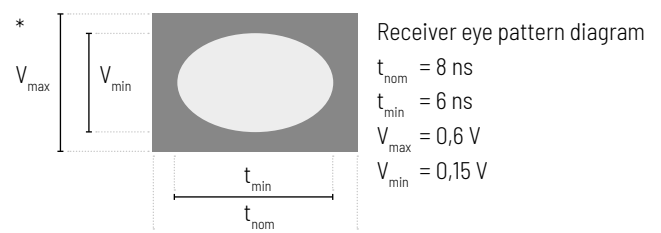


NEXUS // NETWORKED AUDIO MATRIX

NOW, IT'S TIME FOR YOU TO DEFINE YOUR SYSTEM'S FUTURE.


Every installation is unique, requiring a system that aligns perfectly with its specific requirements. Our commitment to customised solutions ensures that each scenario receives the ideal system configuration. Are you looking for a modular design that offers flexibility and seamless expansion? Or do you prefer the stability and simplicity of a fixed system? Perhaps a combination of both, blending flexibility with permanence, will best meet your needs. Would you like to continue using your proprietary system or network via IP? NEXUS supports both options, keeping you always up-to-date with maximum freedom and performance. With STAGETEC, our NEXUS networked audio matrix systems will serve as the reliable heartbeat of your installation.

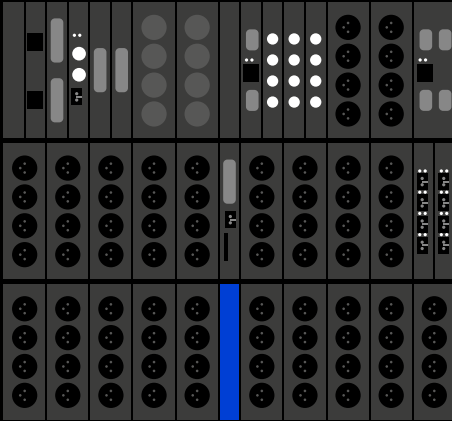

NEXUS modular



NEXUS compact

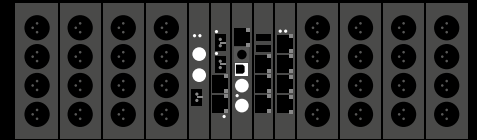

NEXUS 4split

STAGETEC

Sales and Services GmbH & Co. KG
Ottostraße 11 | 96047 Bamberg | Germany
T. +49 (0)30 / 63 99 02-850
info@stagetec.com
www.stagetec.com

STAGETEC GmbH

Tabbertstraße 10-11 | 12459 Berlin | Germany
T. +49 (0)30 / 63 99 02-0